

FBHE Series

SMD EMI Suppression Ferrite Bead

Size 1812



CHARACTERISTICS


- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 1000pcs

APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

Dimensions: [mm]

Land Pattern: [mm]

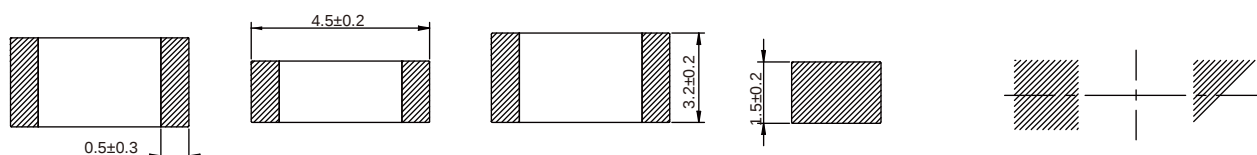

Electrical Properties:

	(Ω)		(max) (Ω)	Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		

Operating Temperature: -55 °C ~ +125 °C

Temperature rise current the actual value of DC current when the temperature rise is ΔT40 °C

Impedance & Frequency Characteristics:

